

# 25. Development of Automatic Pond Reservoir System to Support Automatic Surface Vehicle.pdf

*by*

---

**Submission date:** 02-Aug-2023 12:26PM (UTC+0700)

**Submission ID:** 2140296749

**File name:** 25. Development of Automatic Pond Reservoir System to Support Automatic Surface Vehicle.pdf (762.04K)

**Word count:** 3116

**Character count:** 15561

PAPER · OPEN ACCESS

## Development of Automatic Pond Reservoir System to Support Automatic Surface Vehicle

To cite this article: P Destarianto *et al* 2023 *IOP Conf. Ser.: Earth Environ. Sci.* **1168** 012052

View the [article online](#) for updates and enhancements.

### You may also like

- [The production of tiger prawn \(\*Penaeus monodon\*\) juveniles using the hapas on brackishwater pond in Sidoarjo Regency](#)  
B Pantjara, H S Suwoyo and I Rusdi
- [The condition and nutrient content of introduced freshwater shrimp \*Macrobrachium lanchesteri\* at two urban small ponds, Cibinong, West Java, Indonesia](#)  
N Mayasari, D S Said and M P Astuti
- [Fluctuation Effect of Dissolved of TAN \(Total Ammonia Nitrogen\) on Diatom Abundance in Intensive Shrimp Culture Ponds](#)  
H Ariadi, M. B Syakirin, S Hidayati *et al.*



244th ECS Meeting

Gothenburg, Sweden • Oct 8 – 12, 2023

Early registration pricing ends  
September 11

Register and join us in advancing science!

Learn More & Register Now!



## Development of Automatic Pond Reservoir System to Support Automatic Surface Vehicle

P Destarianto<sup>1\*</sup>, D R Hartadi<sup>1</sup>, R Ayuninghemi<sup>1</sup>,

<sup>1</sup>Department of Information Technology, State Polytechnic of Jember, Indonesia

\*Email: prawidya@polije.ac.id

**Abstract.** Water quality is an important segment in shrimp farming. The main factor of water in ponds is seen from several dimensions, including the amount of dissolved oxygen, pH, and temperature. The implementation of the farmers at the research site uses a waterwheel approach for toot oxygen, KOH/Lime for pH, and circulating water in the pond for temperature. As the main factor, water must meet standards, oxygen levels (3-7ppm), pH (7-9pH), and temperature (24-32°C). This standardization aims to produce optimal shrimp culture considering that shrimp is one of the sensitive and cannibalistic animals. For example, if the temperature or pH suddenly changes, the shrimp will eat each other, but this standardization is challenging for farmers due to limitations. Human Resources. This study aims to develop an Automatic Pond Reservoir. The system built in this study implements fuzzy logic control on the Arduino for the classification process. It triggers the Pond Reservoir to ensure the water remains in optimal conditions for shrimp growth and development. The results of the tests were 282 times, showing an accuracy of 90%.

### 1. Introduction

Water quality is the main factor in shrimp farming, as the main factor of water in ponds seen from several dimensions, including the amount of dissolved oxygen, pH and temperature [1][2]. The implementation of the farmers at the research site uses a waterwheel approach for toot oxygen, KOH/Lime for pH, and circulating water in the pond for temperature. As the main factor, water must meet standards, oxygen levels in the range 3-7, pH in the range 7-9, and temperature in the range 24-32(C)[3].

This standardization aims to produce optimal shrimp culture considering that shrimp is one of the sensitive and cannibalistic animals, for example if the temperature or pH suddenly changes, the shrimp will eat each other[4], but this standardization is a challenge for the community. farmers due to limited human resources who control water conditions and provide proper treatment of water conditions. This limitation results in the need for a system that can automatically assess and then provide appropriate treatment (accelerating the waterwheel lane, increasing/lowering the PH, and opening or closing the water flow to bring it to an optimal temperature).

This research is based on [5] aims to develop Automatic Pond Reservoir which is integrated with previous research on Realtime Surface Modeling Vehicle Tambak Shrimp (ReSMeV-TU) [6][7]. The system built in this study implements fuzzy logic control on the Arduino for the classification process



Content from this work may be used under the terms of the [Creative Commons Attribution 3.0 licence](https://creativecommons.org/licenses/by/3.0/). Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

and triggers the Pond Reservoir to ensure the water remains in optimal conditions for shrimp growth and development, while the shrimp used in this study is the Vaname shrimp. The results of the tests carried out were 282 times, showing an accuracy of 90%. It is hoped that with the tools developed by this research, Vename Shrimp farming can be carried out with more precision.

## 2. Related Work

Shrimp is a unique living creature, this is because shrimp is one of the very sensitive, especially in water. Shrimp will become cannibals if there is a sudden change in the water, such as a change in temperature or pH [4]. This characteristic has been understood by farmers, but it becomes a challenge in itself to become the water temperature in ideal conditions, this is because in some cultivation conditions found in the study, the number of human resources is a challenge for farmers. On the other hand, farmers also face the challenge of optimal cultivation which leads to the efficiency of cultivation costs, so that research has emerged conducted by [8] he tried to do alternative resources, but there are also those who take an approach such as research conducted by [9] which uses Fuzzy Logic. with industry expert forums to minimize production costs and maximize shrimp growth.

Research conducted by [10] tried to integrate several pools using XBee communication and motoring them. Research conducted by [11] uses deep learning: CNN to analyze dynamic parameters using images. Research conducted by [12] sed aquaculture optimization by performing pond management (parameters of water level, pH, temperature and humidity). Research conducted by [13][14][15][16] also carried out water quality classification.

The research conducted above focuses on reading water quality [17], but has not yet entered into the standardization/manipulation of water so that it reaches the optimal indicator of shrimp growth [18]. The standardization of water quality in this study was carried out by adding KOH, opening the pond drain valve and adding water with normal temperature (25°C), and accelerating PWM on the waterwheel. Readings designed at once every 15 minutes will allow one cycle of reading and adjustments to be made over the same range. This will certainly improve the quality of the readings/accuracy of the suitability of water quality according to the needs of shrimp growth and development.

## 3. Research Methods

The research method is shown in Figure 1, this study begins with a literature review, research conducted by [9], [19] and [20] that fuzzy is appropriate for partial data. Besides being suitable for fuzzy partial data, it is also suitable for monitoring needs. Fuzzy in this study will be used to acquire data from sensors on previously developed tools [6][7], to then refine the rules to control the valve (pH and water flow) and PWM for the waterwheel.

Novelty that has been found is then continued with system design, at this stage the working mechanism of the hardware and software of the application is designed. Hardware is used to acquire water quality data, the acquired data is then sent using NodeMCU/ESP8266 and stored in the database, the process then proceeds to the classification process. The results of this classification are used as the basis for activation of the pH valve and the PWM value for the waterwheel. The results of this design are then continued with the implementation of the system.

The implementation of this system consists of hardware and software implementation, so that in the next stage testing is also carried out for both. In addition, related to the method used, initial testing was also carried out at the system test stage using training data (70% data). While the rest of the data (30%), used in the next stage, namely evaluation and conclusions. At this last stage, conclusions will be drawn about the accuracy of the application of methods, hardware and software implementations that have been tested (black box).

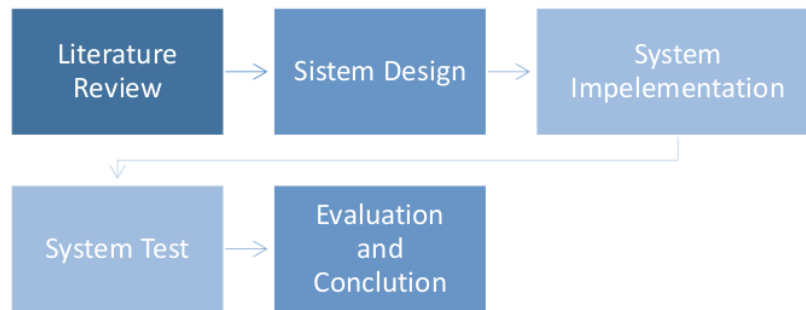


Figure 1. Research Methods

#### 4. Discussion

##### 4.1. Automatic Pond Reservoir System

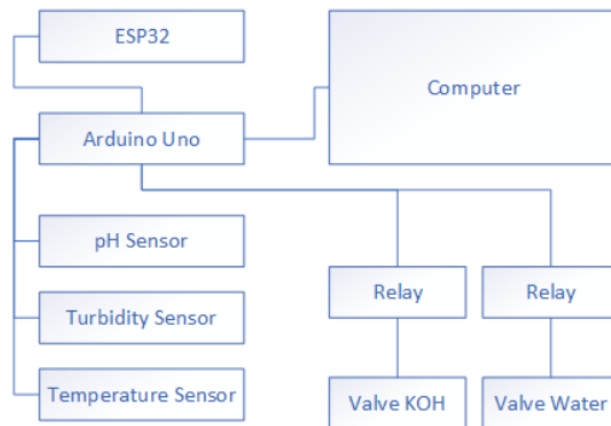


Figure 2. Block Diagram

The design of the system developed is shown in Figures 2 and 3. Where in the image it is clear that the components used in this study are used. In simple terms, the hardware communicates with the ESP32, which is also the main gate for data flow from the device. Then in the picture it is clear that there are three sensors (temperature, turbidity and pH) connected to the Arduino, then the data that has been processed according to the rule will activate the relay connected to the water valve and KOH and connected to the windmill by sending the required PWM.

Table 1. Variable Range

Class	Temp.	Range	pH	Range	Turbidity	Range	DO	Range
1	Low	≤ 26	Acid	≤ 7.5	Low	≤ 250	Low	≤ 4
2	Normal	24-32	Netral	7-9	Normal	200-450	Normal	3-7
3	High	≥ 30	Basa	≥ 8.5	High	≥ 400	High	≥ 6



**Figure 3.** Implementation Hardware

*4.2. Fuzzy Calculation*

The sensors used in this study: temp. (°C), pH (pH), turbidity (NTU) and DO (ppm) sensors. The output on the sensor will then be processed as input to Fuzzy, the value limits/ranges based on data obtained from the field are shown in Table 1. Each sensor is divided into three classes, In each component besides being processed to produce water quality classes, it is also used to calculate the value of each (fuzification only) for the trigres valve.

Equation 1 shows the membership function for pH, Equation 1 has 3  $\mu$ , where each  $\mu$  represents the class used in this study. For research pH using three classes, namely low, neutral and alkaline. While the limit value for pH is obtained from shrimp farmers who in its implementation in the field still use the pH parameter as in general (no special limit), but in Vename Shrimp culture the optimal pH is in the range 7.5 to 8.5..

**Table 2.** Inference

Number	Temp.	pH	Turbidity	DO	Class
1	1	1	1	1	Very-Bad-Water
2	1	1	2	2	Bad-Water
3	1	1	3	3	Very-Bad-Water
4	1	2	1	1	Bad-Water
5	1	2	2	2	Enough-Water
...	..	..	..	..	..
78	3	3	2	1	Very-Good-Water
79	3	3	2	3	Very-Good-Water
80	3	3	3	1	Good-Water
81	3	3	3	2	Good-Water

$$\mu_{low} = \begin{cases} 0 & ,x \geq 7.5 \\ \frac{(7.5 - x)}{(7.5 - 7)} & ,7 < x < 7.5 \\ 1 & ,x \leq 7.5 \end{cases} \quad \mu_{netral} = \begin{cases} 0 & ,x \leq 7 \text{ and } x \geq 9 \\ \frac{(x - 7.5)}{(7.5 - 7)} & ,7 < x < 7.5 \\ \frac{(9 - x)}{(9 - 8.5)} & ,8.5 < x < 9 \\ 1 & ,7.5 \leq x \leq 8.5 \end{cases} \quad (1)$$

$$\mu_{basa} = \begin{cases} 0 & ,x \leq 8.5 \\ \frac{(x - 8.5)}{(9 - 8.5)} & ,8.5 < x < 9 \\ 1 & ,x \geq 9 \end{cases}$$

As for the inference process shown in Table 2, this table describes the AND process, for example in route number 1, If pH = acid and temperature = low and turbidity = not cloudy and DO = low then the water quality is very bad. One of the duplications in the route implementation. [R1] IF cold temperature AND low oxygen levels AND acidic pH AND turbidity not cloudy THEN very poor water quality 1 = cold temperature low oxygen acid pH not cloudy, shown by Equation 2.

$$\alpha_1 = \mu_{temperature\ low} \cap \mu_{DO\ low} \cap \mu_{pH\ acid} \cap \mu_{tubi.\ low} \quad z_1\ Very\ Bad = 0.01 \quad (2)$$

$$= \min(1, 0, 1, 1) = 0$$

Fuzzy Sugeno (Weight Average) defuzzification in this study, for example in the sample used, can be seen from Equation 3. Where in the calculation the resulting Z value is 0.01.

$$Z = \frac{\alpha(1) * z(1) + \alpha(2) * z(2) + \alpha(3) * z(3) + \alpha(4) * z(4) + \dots + \alpha(81) * z(81)}{\alpha(1) + \alpha(2) + \alpha(3) + \alpha(4) + \dots + \alpha(81)} \quad (3)$$

$$= \frac{0 * 0.25 + 0 * 0.5 + 0 * 0.75 + 0 * 0.25 + 0 * 0.01 + 1 * 0.25 + \dots + 0 * 0.5}{0 + 0 + 0 + 0 + 0 + 1 + \dots + 0} = \frac{0.01}{1} = 0.01$$

4.3. Testing and Result

Table 3. Functional Tests: Black Box (BB)

Num.	Item Test	Function Test	Result Test
1	ESP32	Data Transmit	✓
2	Sensor: Temp.	Reda Temp. Val.	✓
3	Sensor: Turbi.	Read Turbi. Val.	✓
4	Sensor: pH	Read pH Val.	✓
5	Sensor: DO	Read DO Val.	✓

Table 4. Fuzzy Testing Result

Num.	Temp. Val.	pH Val.	Turbi. Val.	DO Val.	Class Result	Expert Assessment
1	28	7.18	276	11.30	0.38 (Bad)	Ep: False
2	28	7.52	276	11.21	0.51 (Enough)	Ep: True
...	..	..	..	..	..	..
97	27	7.37	276	11.30	0.50 (Enough)	Ep: True
98	28	7.37	275	11.32	0.48 (Bad)	Ep: True
99	28	7.47	276	11.24	0.51 (Enough)	Ep: True
100	28	7.18	276	11.35	0.39(Bad )	Ep: False

The development was successful based on the black-box tests shown in Table 3, where all the results: all successful (100%). This study use a ground truth, shown in Table 4. If the result is the same, it is counted as correct, otherwise it is counted as error. A test performed generated by the sensor (tool) returned an accuracy value of 90%.

## 5. Conclusion

As a result of our research, we were able to develop an automatic reservoir system. This is evidenced by black box test results showing a system compatibility score of 100%/all functions work normally. On the other hand, a test performed yielded an accuracy value of 90%. From the results obtained by the research, it is hoped that this tool can be implemented through further research to continue to help farmers.

## Acknowledgment

The authors would like to acknowledge the financial support of this work by grants from PNBP, Politeknik Negeri Jember. The author also thanked the P3M Politeknik Negeri Jember, which has provided support and assistance in completing this research.

## References

- [1] Syafaat M N, Mansyur A and Tonnek S 2012 Dinamika kualitas air pada budidaya udang vannamei (*Litopenaeus vannamei*) semi-intensif dengan teknik pergiliran pakan *Pros. Indoaqua-Forum Inov. Teknol. Akuakultur* 487–94
- [2] Fuady M F, Supardjo M N and Haeruddin 2013 Pengaruh Pengelolaan Kualitas Air terhadap Tingkat Kelulushidupan dan Laju Pertumbuhan Udang Vaname (*Litopenaeus vannamei*) di PT. Indokor Bangun Desa, Yogyakarta *Diponegoro J. Maquares Manag. Aquat. Resour.* **2** 155–62
- [3] KKP 2016 *Permen-KP No. 75*
- [4] Pinitava D, Surinlert P and Kusakunniran W 2021 Water Quality Forecasting in Shrimp Cultures based on Monte Carlo Tree Search *2021 7th Int. Conf. Eng. Appl. Sci. Technol. ICEAST 2021 - Proc.* 199–204
- [5] Muchtar E, Sanjaya E and Hariadi F I 2017 Human machine interface on e-Shrimp as smart control system for whiteleg shrimp pond *2017 Int. Symp. Electron. Smart Devices, ISESD 2017 2018-Janua* 24–9
- [6] Agustianto K, Kustiari T, Destarianto P and Wiryawan I G 2021 Development of realtime surface modeling vehicle for shrimp ponds ( ReSMeV-SP ) *IOP Conf. Ser. Earth Environ. Sci.*
- [7] Destarianto P, Agustianto K, Rosdiana E, Wiryawan I G and Mulyadi E 2022 Surface Modeling Vehicle for Shrimp Ponds using Artificial Neural Network *IOP Conf. Ser. Earth Environ. Sci.* **980**
- [8] Sarmiento-Carrillo J, Torres J E and Torres M A 2021 PROPOSAL OF AN ELECTRIC TECHNICAL MODEL FOR THE IMPROVEMENT OF EFFICIENCY AND ENVIRONMENTAL SUSTAINABILITY IN SHRIMP PRODUCTION *CIREDA 2021 - The 26th International Conference and Exhibition on Electricity Distribution* vol 2021 (Institution of Engineering and Technology) pp 2334–8
- [9] Pereira J, Mora M and Agila W 2021 Qualitative Model to Maximize Shrimp Growth at Low Cost *2021 IEEE Fifth Ecuador Technical Chapters Meeting (ETCM)* (IEEE) pp 1–7
- [10] Capelo J, Ruiz E, Asanza V, Toscano-Quiroga T, Sanchez-Pozo N N, Lorente-Leyva L L and Peluffo-Ordóñez D H 2021 Raspberry Pi-based IoT for shrimp farms Real-time remote monitoring with automated system *2021 International Conference on Applied Electronics (AE)* (IEEE) pp 1–4
- [11] Lin T-S, Chu T-J, Shih Y-J, Yang J-K, Wan J and Lin X-Y 2021 Application and Development of Shrimp Farming Intelligent Monitoring System on Edge Computing *2021 IEEE 3rd International Conference on Architecture, Construction, Environment and Hydraulics (ICACEH)* (IEEE) pp 66–9



- [12] Teja K B R, Monika M, Chandravathi C and Kodali P 2020 Smart Monitoring System for Pond Management and Automation in Aquaculture *Proc. 2020 IEEE Int. Conf. Commun. Signal Process. ICCSP 2020* 204–8
- [13] Shanmugam K, Rana M E and Jaspal Singh R S 2021 IoT-based Smart Water Quality Monitoring System for Malaysia 2021 *Third International Sustainability and Resilience Conference: Climate Change* (IEEE) pp 530–8
- [14] Binti Makhtar S A, Binti Burham N and Abdul Aziz A B 2022 Design and Implementation of Real Time Approach for The Monitoring of Water Quality Parameters 2022 *IEEE 12th Symposium on Computer Applications & Industrial Electronics (ISCAIE)* (IEEE) pp 311–6
- [15] Sugumar S J, R S, Phadke S, Prasad S and R S G 2021 Real Time Water Treatment Plant Monitoring System using IOT and Machine Learning Approach 2021 *International Conference on Design Innovations for 3Cs Compute Communicate Control (ICDI3C)* (IEEE) pp 286–9
- [16] Kamboj A, Garg P, Bansal D, Sankar A and Bukya M 2021 Development of Android App-based Portable Water Quality Testing Device using Arduino 2021 *9th International Conference on Reliability, Infocom Technologies and Optimization (Trends and Future Directions) (ICRITO)* (IEEE) pp 1–4
- [17] Wibowo N S, Destarianto P, Riskiawan H Y, Agustianto K and Kautsar S 2018 Development of low-cost autonomous surface vehicles (ASV) for watershed quality monitoring 2018 *6th International Conference on Information and Communication Technology, ICoICT 2018* vol 0 (IEEE) pp 489–94
- [18] Agustianto K, Destarianto P and Dewanto W K 2020 Development of real-time motion autonomous surface vehicle controlling for coral reef conservation and fisheries *IOP Conf. Ser. Earth Environ. Sci.* **411**
- [19] Camiel A C and Schneider M 2021 A Survey of Fuzzy Approaches in Spatial Data Science 2021 *IEEE International Conference on Fuzzy Systems (FUZZ-IEEE)* pp 1–6
- [20] Khan N, Elizondo D A, Deka L and Molina-Cabello M A 2021 Fuzzy Logic Applied to System Monitors *IEEE Access* **9** 56523–38

# 25. Development of Automatic Pond Reservoir System to Support Automatic Surface Vehicle.pdf

---

## ORIGINALITY REPORT

---

**23%**

SIMILARITY INDEX

**21%**

INTERNET SOURCES

**15%**

PUBLICATIONS

**12%**

STUDENT PAPERS

---

## MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

---

17%

★ sipora.polije.ac.id

Internet Source

---

Exclude quotes  On

Exclude matches  Off

Exclude bibliography  On