



ISBN : 978-1-7281-3016-3

PROCEEDINGS OF



<http://icaiti.org>

ICAITI2019

2nd

INTERNATIONAL CONFERENCE
ON APPLIED INFORMATION
TECHNOLOGY AND INNOVATION

September 21-22, 2019
in Bali, Indonesia

Organized by
Department of Information Technology
Politeknik Negeri Padang

Theme :
Exploring the Future Technology of Applied
Information Technology and Innovation



TEKNOLOGI
INFORMASI

POLITEKNIK NEGERI PADANG

COMMITTEE

Steering Committee

Prof. Kukjin Chun (Seoul National University, Korea)
Prof. Chun Che (Lance) Fung (Murdoch University, Australia)
Prof. Dr. Eng. Wisnu Jatmiko (Universitas Indonesia, Indonesia)
Dr. Kurnianingsih (Politeknik Negeri Semarang, Indonesia)

Organizing Committee

Conference Chair : **Rahmat Hidayat** (Politeknik Negeri Padang, Indonesia)
 General Co-Chair : **Indri Rahmayuni** (Politeknik Negeri Padang, Indonesia)
 Program Chair : **Ansari Ahmar** (Universitas Negeri Makasar, Indonesia)
 Publication Chair: **Andri Pranolo** (Universitas Ahmad Dahlan, Indonesia)
 Technical Program Chair : **Robbi Rahim** (Institut Teknologi Medan, indonesia)
 Conference Treasurer: **Rasyidah** (Politeknik Negeri Padang, Indonesia)
 Secretariat : **Aldo Erianda** (Politeknik Negeri Padang, Indonesia)
Alde Alanda (Politeknik Negeri Padang, Indonesia)

Technical Program Committee

Prof. Dr. Shi-Jinn Horng, (National Taiwan University Sains & Technology (NTUST)), Taiwan
Prof. Dr. Abderrafiaa Koukam (Université de Technologie de Belfort-Montbéliard (UTBM)),Fr
Assoc. Prof. Dr. Emanuele Menegatti, (Universita degli Studi di Padova, Padua), Italy
Assoc. Prof. Dr. Nishchal K. Verma, (Indian Institute of Technology, Kanpur), India
Dr. Arda Yunianta, (King Abdul aziz University), Saudi Arabia
Dr. Lala Septem Riza, (Universitas Pendidikan Indonesia), Indonesia
Dr. Moslem Yousefi, (Korea university), Korea, Republic of
Dr. Danial Hooshyar, (Korea University), Korea, Republic of
Dr Umni Rabaah Hashim, (Universiti Teknikal Malaysia Melaka), Malaysia
Dr. Abdulrazak Yahya Saleh, (Universiti Malaysia Sarawak), Malaysia
Dr.Iwan Tri Riyadi Yanto, (Universitas Ahmad Dahlan), Indonesia
Assoc. Prof. Leon A. Abdillah, (Bina Darma University), Indonesia
Dr. Genett Jimenez, (Institución Universitaria ITSA), Colombia
Dr. Leonel Hernandez (Institución Universitaria ITSA), Colombia
Prof. Tudor Palade Technical University of Cluj-Napoca
Prof. Jan-Shin Ho National Penghu University of Science and Technology
Prof. Ismail Musirin Universiti Teknologi Mara, Shah Alam
Prof. Toshiro Kodera Meisei University
Dr. Alessandro Testa Ministry of Economy and Finance
Dr. Shahreen Kasim University of Tun Hussein Onn Malaysia
Dr. Diogo Pratas University of Aveiro
Dr. Awang Pratomo Universitas Pembangunan Nasional Veteran Yogyakarta
Dr. Kamsuriah Ahmad, Universiti Kebangsaan Malaysia
Dr. Sabrina Ahmad, Universiti Teknikal Malaysia Melaka
Dr. Walid Al-Hussaibi, Southern Technical University
Dr. Haider AlSabbagh, Basra University
Dr. Mohd Sanusi Azmi, Universiti Teknikal Malaysia Melaka
Dr. Noraswaliza Abdullah Kolej (Universiti Teknikal Kejuruteraan Malaysia)
Dr. Parameshchhari Bidare Divakarachari Visvesvaraya Technological University
Dr. Rohayanti Hassan, Universiti Teknologi Malaysia
Dr. Mustafa Mat Deris University Tun Hussein Onn Malaysia
Dr. Lala Riza Universitas Pendidikan Indonesia
Dr. Jufriadif Na`am Universitas Putra Indonesia YPTK
Dr. Yuhefizar Politeknik Negeri Padang
Dr. Salman YussofUniversiti Tenaga Nasional
Dr. Supratman Zakir IAIN Bukittinggi
Dr. Leon Abdillah (Bina Darma University)
Dr. Dahlan Abdullah, (Universitas Malikussaleh)
Dr. Rizal Aji, University of Indonesia
Dr. Bishanka Bhowmik, Tripura University
Dr. Dodi Devianto, Andalas University, University of Nis
Dr. Umni Hashim, UteM
Dr. Havaluddin Havaluddin, Universitas Mulawarman

Dr. Leonel Hernandez ITSA University
Dr. Abdul Razak Hussain Universiti Teknikal Malaysia Melaka
Dr. Ahmed Hussein University of Connecticut
Dr. Dana Indra Sensuse University of Indonesia
Dr. Darmawan Napitupulu LIPI
Dr. Shahril Parumo Universiti Teknikal Malaysia Melaka
Dr. Robbi Rahim Institut Teknologi Medan
Dr. Indri Rahmayuni Politeknik Negeri Padang
Dr. Rasyidah Rasyidah Politeknik Negeri Padang
Dr. Lizawati Salahuddin Universiti Teknikal Malaysia Melaka
Dr. Harry Santoso Universitas Indonesia
Dr. Djoko Setyohadi Universitas Atma Jaya Yogyakarta
Dr. Vasco Soares Polytechnic Institute of Castelo Branco, Instituto de
Dr. Preecha Somwang Mahanakorn University of Technology
Dr. Yance Sonatha Politeknik Negeri Padang
Dr. Endah Sudarmilah Universitas Muhammadiyah Surakarta
Dr. Muhammad Suhaizan Sulong Universiti Teknikal Malaysia Melaka
Dr. Deden Witarsyah Telkom University
Dr. Baichuan Zhang Indiana University Indianapolis
Dr. Hendrick National Kaohsiung University of Science and Technology, Taiwan

TABLE OF CONTENTS

Track A Electrical and Electronic Engineering

EE-1	SWIPT-Assisted Device-to-Device Communications Underlying a Cellular System Hieu V. Nguyen, Hyeon Min Kim, Gil-Mo Kang, Yoan Shin, and Oh-Soon Shin (Soongsil University, Korea)	1
EE-2	Design of an Indoor Localization System Based on WLAN for Assisting Victim's Evacuation Process Viska Mutiawani, Cut Thifal Nazila, Kurnia Saputra, Amalia Mabrina MR (Syiah Kuala University Banda Aceh, Indonesia)	6
EE-3	Three-Phase Direct Matrix Converter With Space Vector Modulation for Induction Motor Drive Era Purwanto, Farid Dwi Murdianto, Dahried Wahyu Herlambang, Gamar Basuki, Mentari Putri Jati (Politeknik Elektronika Negeri Surabaya, Indonesia)	11
EE-4	Implementation of Single Stage Converter (Z-Source Inverter) For Induction Motor Supply Indra Ferdiansyah, Era Purwanto, Lucky Pradigta S.R, Diah Septi Yanaratri, Rachma Prilian Eviningsih, Tita Aprilia (Politeknik Elektronika Negeri Surabaya, Indonesia)	17
EE-5	Multi Agent Protocol for Cooperative Rear-end Collision Avoidance System Noor Cholis Basjaruddin (Politeknik Negeri Bandung), Zakka Izzatur Rahman Noor, Dwi Hendratmo Widyantoro (Institut Teknologi Bandung, Indonesia)	23
EE-6	Design Of Single Phase Full Bridge Inverter for Uninterruptible Power Supply (UPS) Epyk Sunarno, Indhana Sudiharto, Indra Ferdiansyah, Syechu Dwitya Nugraha, Ony Asrarul Qudsi, Mahbub Gusti Muhammad (Politeknik Elektronika Negeri Surabaya, Indonesia)	27
EE-7	Design of Battery Charging System as Supply of Rice Threshers in Tractor Sutedjo, Indra Ferdiansyah, Ony Asrarul Qudsi, Fandi Setiawan (Politeknik Elektronika Negeri Surabaya, Indonesia)	32
EE-8	Movement Control of Two Wheels Balancing Robot Using SMC Based on Lyapunov Analysis Nurul Hasanah, Syadza Atika Rahmah, Wulandari Puspita Sari, Niam Tamami Alrijadjis, Bambang Sumantri (Politeknik Elektronika Negeri Surabaya, Indonesia)	37
EE-9	Security Concerns of Ridesharing Services in Bangladesh Shamse Tasnim Cynthia, Moname Majumder, Anika Tabassum, Nazmun Nahar Khanom, Rashedul Amin Tuhin, Amit Kumar Das (East West University, Bangladesh)	44
EE-10	LACP Experiment Using Multiple Flow Table in Ryu SDN Controller Farid Baskoro, Risanuri Hidayat, Sigit Basuki Wibowo (Universitas Gadjah Mada)	51
EE-11	Separation of Acoustic Signals on a Compressor Using FastICA Anindita Adikaputri Vinaya ¹ , Sefri Yulianto ² , Qurrotin A'yunina M. Okta Arifianti ³ , Dhany Arifianto ⁴ , Aulia Siti Aisjah (Universitas Internasional Semen Indonesia Gresik, Indonesia)	56
EE-12	DDoS Detection on Network Protocol Using Neural Network with Feature Extract Optimization	60

	Andi Maslan, Sestri Novia Rizki (Universitas Putera Batam Batam Indonesia) Kamaruddin Malik Mohammad, Feresia Binti Mohd Foozy (Universiti Tun Hussein Onn Malaysia)	
--	--	--

Track B Artificial Intelligents

AI-1	Prediction of Semantically Correct Bangla Words Using Stupid Backoff and Word-Embedding Model Tanni Mitra, Linta Islam, Deepak Chandra Roy (West University Dhaka, Bangladesh)	66
AI-2	Priority Path for Mutant Repairs on Mutation Testing Sasa Ani Arnomo (Universitas Putera Batam, Indonesia), Noraini Binti Ibrahim (Universiti Tun Hussein Onn Malaysia)	71
AI-3	Optimization of Genetic Algorithms on Backpropagation Neural Network to Predict National Rice Production Levels Aditya Wisnugraha Sugiyarto, Dhoriva Urwatul Wutsqa, Novia Hendiyani, Achmad Ramadhanna'il Rasjava (Yogyakarta State University, Indonesia)	77
AI-4	Ultra Step Up Converter Using Fuzzy Sugeno on HVDC Application Arman Jaya, Farid Dwi Murdianto, Era Purwanto, Ardiansyah Rachmatdianto (Politeknik Elektronika Negeri Surabaya, Indonesia)	82
AI-5	Implementation of Maximum Power Point Tracking on Solar Panels using Cuckoo Search Algorithm Method Indra Ferdiansyah, Sutedjo, Ony Asrarul Qudsi, Alvin Noer Ramadhan (Politeknik Elektronika Negeri Surabaya, Indonesia)	88
AI-6	Classification of Segmented Milkfish Eyes Using Cosine K-Nearest Neighbor Eko Prasetyo, R. Dimas Adityo, Rani Purbaningtyas (University of Bhayangkara Surabaya, Indonesia)	93
AI-7	Hyper-parameter Determination of CNN Classifier for Head Pose Estimation of Three Dimensional Degraded Face Images Randy Pangestu Kuswana, Akhmad Faqih, Benyamin Kusumoputro (Universitas Indonesia Depok, Indonesia)	99
AI-8	Robustness Analysis of PI Controller to Optimizing The Output Power for Energy Management in DC Microgrid System Indhana Sudiharto, Epyk Sunarno, Farid Dwi Murdianto, Eni Wulandari (Politeknik Elektronika Negeri Surabaya, Indonesia)	105
AI-9	Designing Mamdani Fuzzy Inference Systems for Decision Support Systems Humaira, Rasyidah, Indri Rahmayuni (Politeknik Negeri Padang, Indonesia)	111
AI-10	Measurement of Stain Area in Metal Surface with Particle Analysis Riandini, Shahnun Kamil Dewantoro, Reza Istoni (Politeknik Negeri Jakarta, Indonesia)	116
AI-11	IOS Mobile APP for Tuberculosis Detection Based on Chest X-Ray Image Hendrick, Wang Zhi-Hao, Chen Hsien-I, Chang Pei-Lun, Jong Gwo-Jia (University of Science and Technology Kaohsiung, Taiwan)	122

Track C Information Systems

IS-1	Analysis of The Effect of Quality Mulawarman University Language Center Websites on User Satisfaction Using The Webqual 4.0 Method Muhammad Bambang Firdaus, Novianti Puspitasari, Edy Budiman, Joan Angelina Widiangs, Nur Bayti (Mulawarman University Samarinda, Indonesia)	126
IS-2	Master Data Management Maturity Assessment: Case Study of XYZ Company Regin Iqbal Mareza, Pramana Yuda, Wahyu Aditya, Achmad Nizar Hidayanto, Putu Wuri Handayani, Nabila Clydea Harahap (Universitas Indonesia, Indonesia)	133
IS-3	The Evaluation of Finance Module Implementation of Enterprise Resource Planning (ERP) for Employee Performance Dayane Kamila Hafifah, Deden Witarsyah, Muhardi Saputra, Anik Hanifatul Azizah, Marhaeni Eka Saputri (Telkom University)	140
IS-4	Content-based Image Retrieval System for Locating Building in Syiah Kuala University Using Android Platform Nazaruddin, Kurnia Saputra, Amalia Mabrina Masbar Rus, Dedek Fitri (Universitas Syiah Kuala Banda Aceh, Indonesia)	146
IS-5	Integrating Nagari Information in West Sumatera with Laravel Framework Hidra Amnur, Rasyidah, Yance Sonatha (Politeknik Negeri Padang)	152
IS-6	E-Vent: Support System for Event Registration Yohanes Priadi Wibisono, Clara Hetty Primasari, Alwi Kesuma (Universitas Atma Jaya Yogyakarta, Indonesia)	157
IS-7	Design of Electronic Medical Record Security Policy in Hospital Management Information System (SIMRS) in XYZ Hospital Hana Avianto, Dion Ogi (Sekolah Tinggi Sandi Negara Bogor, Indonesia)	163
IS-8	Sales Data Monitoring Systems Telkom Indonesia Witel Samarinda Field Business Government and Enterprise Andi Tejawati, Muhammad Bambang Firdaus, Sugesty Pramana Aditya, Edy Budiman, Masna Wati, Medi Taruk (Mulawarman University, Indonesia)	168
IS-9	Impact of Social Media on Socialization of University Students (A study on East West University's Undergraduate Students) Maliha Hassan, Anik Saha, Nujat Saba, Rashedul Amin Tuhin, Amit Kumar Das (East West University, Dhaka, Bangladesh)	173
IS-10	Software Piracy : Factors and Profiling Afsana Hossain, Jahidul Hoque, Amit Kumar Das, Nishat Tasnim Mim, Jahidul Hoque, Rashedul Amin Tuhin (East West University, Dhaka, Bangladesh)	213
IS-11	Digital Governance for Pension Withdrawal System in Bangladesh Shamima Sultana, Mohammad Hemayet Ullah, Sumiya Akter Nisher, Md. Shahad Iqbal, Md. Rashedul Amin Tuhin, Amit Kumar Das (East West University, Dhaka, Bangladesh)	185
IS-12	Hotel Room Price Determination Based on Dynamic Pricing Model Using Nonlinear Programming Method To Maximize Revenue Muhammad Fadly, Ari Yanuar Ridwan, Mohammad Deni Akbar (Telkom University, Indonesia)	190

IS-13	A Behavioral Model of Music Piracy in Bangladesh : Factors Influencing Music Piracy Syed Sahariar Hassan, Fatema Nihar, Maimuna Rahman, Md Washim Razu, Rashedul Amin Tuhin, Amit Kumar Das (East West University, Dhaka, Bangladesh)	197

Track D Computer Engineering

CE-1	Performance Evaluation of MongoDB, Cassandra, and HBase for Heterogenous IoT Data Storage Eko Sakti Pramukantoro, Dany Primanita Kartikasari, Reza Andria Siregar (Brawijaya University, Indonesia)	203
CE-2	Implementation of Hybrid Password Authentication Scheme Based on Shape-Text on Raspberry Pi as a Client-Server-Based Access Control System to Overcome Shoulder Surfing Attack Alfian Andre Anto, Dian Ogi (Sekolah Tinggi Sandi Negara, Indonesia)	207
CE-3	Crowdsourced Transport Management System for Smartphone Users Md.Sohel Rana, Md. Jakir Hosen, Abdullah Al Noman, Linta Islam, Tanni Mitra (East West University, Dhaka, Bangladesh)	179
CE-4	Image Fusion-based Multi-frequency Microwave Tomography Sebastian Siburian, Sastra Kusuma Wijaya, Prawito Prajitno (Universitas Indonesia)	220
CE-5	A Simulation of Enhanced Oil Recovery of Surfactant Flooding Using Sodium Lignosulfonate by CMG-STARS Sukmana, Anggara, Azis, Cahyono (Universitas Gadjah Mada, Indonesia), Putra (Universitas Islam Riau, Indonesia)	227
CE-6	Performance Analysis of Simple Capacitive Cylinder Sensor for Measuring Soil Moisture Content Radi, Bambang Purwantana, , Anditya Sridamar Pratyasta, Bayu Kuncoro, Nadia Umi Hanifah,(Universitas Gadjah Mada) Muhammad Rivai (Institut Teknologi Sepuluh Nopember)	231
CE-7	Potency of Image Color & Textural Feature for Granular Size Estimation of Ground Coffee Radi, Bambang Purwantana, , Anditya Sridamar Pratyasta, Bayu Kuncoro, Nadia Umi Hanifah,(Universitas Gadjah Mada) Muhammad Rivai (Institut Teknologi Sepuluh Nopember)	236

Classification of Segmented Milkfish Eyes using Cosine K-Nearest Neighbor

1st Eko Prasetyo

Department of Informatics,
Engineering Faculty
University of Bhayangkara Surabaya
Surabaya, Indonesia
eko@ubhara.ac.id

2nd R. Dimas Adityo

Department of Informatics,
Engineering Faculty
University of Bhayangkara Surabaya
Surabaya, Indonesia
dimas@ubhara.ac.id

3rd Rani Purbaningtyas

Department of Informatics,
Engineering Faculty
University of Bhayangkara Surabaya
Surabaya, Indonesia
rpurbaningtyas@ubhara.ac.id

Abstract— The classification of milkfish freshness based on the eyes is supported by the results of correct fish eye segmentation. Generally, the problems faced by segmentation results are many objects with similar characters and similar gray intensity. Segmentation with K-Means produces K layers of binary image according to the selected K cluster. As a result, many objects appear as the result of segmentation. Among all objects appear, the fish eye has a special character, where it is round black. The problem faced by classic K-Nearest Neighbor (KNN) in classification is sensitive to noise when using low K while using high K the classification performance falls to the most class that shouldn't as the result. We propose Cosine KNN (CosKNN) to solve the classic KNN problem where the classification results aren't taken from the most class of nearest neighbor. CosKNN gives soft value that represents the belonging level of each class to the testing data. To evaluate the performance of CosKNN, we use precision and recall. The experiment result shows that the CosKNN achieves performance both precision and recall of 97.93% and 91.15%, respectively, all with shape features. Especially on precision performance, CosKNN achieves the highest performance compared to other methods, CosKNN, classic KNN and K-SVNN achieve 97.93%, 96.20%, and 95.77%. While in recall performance, KNN achieves the highest performance compared to other methods, CosKNN, classic KNN and K-SVNN achieve 91.15%, 92.10%, and 90.76%, respectively, all with shape features.

Keywords— *segmentation, eye fish, milkfish, classification, K-Nearest Neighbor, shape feature, color feature*

I. INTRODUCTION

The classification of milkfish freshness based on the eyes is supported by the results of correct fish eye segmentation. Current research on [1] fish freshness is conducted by using digital image processing to determine the freshness quality and shelf life span of the three most consumed fish in the Philippines. The detected fish are milkfish (*Chanos chanos*), round scad (*Decapterus maruadsi*) and short mackerel scad (*Rastrelliger brachysoma*). By using support vector machine (SVM), this research classifies the redness of the fish's eyes and gills as a measure of the fish freshness quality level. The number images of fish are 1680 images, include 720 images for milkfish, 480 images for round scad, and 480 images for short mackerel scad. The captured image are classified to 4 freshness levels and achieve 98% accuracy. In this study, the segmentation method used is a combination of

histogram equalization and binary thresholding. Segmentation results still raise some noise objects in the binary image results. The next research in [2] classifies the freshness of the fish from level 1 (stale) to level 5 (fresh) based on RGB values of the eyes and gills. By using 800 images each of the eyes and gills, the system achieves 90% accuracy for milkfish. The system uses a mask to get segmented eye fish. Segmentation results do not clearly give eye segmentation results.

Good segmentation is expected to support good results recognition, such as research by [3], segment mango leaves using Otsu's thresholding in the HSV and YCbCr color spaces. The results of the study show that Cr band is more suitable for mango leaf segmentation with precision and recall of 0.995 and 0.971, respectively. The problem faced in the segmentation of milkfish eyes is many objects with similar characters and similar gray intensity. Research conducted by [4] segments the milkfish using a spatial filter to get segmented eye milkfish in the HSV color space. The results of segmentation are compared to the ground truth to get the success rate, precision achieved by 84.04% while recall was achieved by 43.08%. The problem faced by K-Nearest Neighbor is sensitive to noise especially when using low K while using high K the classification performance falls to the most class that shouldn't as the result. We propose Cosine KNN where the classification results aren't taken from the most class of nearest neighbor. We give soft value that represents the belonging level of each class to testing data. These values start from 0 to infinity according to K used.

In this research paper, the framework for segmenting milkfish eyes using K-Means Clustering and Cosine K-Nearest Neighbor (CosKNN) classification is presented to explain how we conduct the segmentation. K-Means segmentation produces K layers of the binary image according to the selected K cluster. As the result, many objects appear as a result of segmentation. Among all the objects that appear, the fish eye has a special character, where it is round black. Based on these different characters, the authors use a classification approach to recognize the object of the correct fish eye. In this paper, we propose Cosine K-Nearest Neighbor (CosKNN) as the classification method to deal with the classic KNN problem.

K-Means as an image segmentation method is also effective to use, such as research [5] recognize plant diseased leaf, K-Means is used to segment the lesion image from each super-pixel. By using pyramid of histograms of orientation gradients (PHOG) descriptor from three color band of each segmented lesion image and its grayscale image, the system provides a feasible solution for plant diseased leaf image segmentation and plant disease recognition. K-Means clustering also used by [6] with neutrosophy to deal with indeterminacy factor of image pixels. The approach is to transform the image into the neutrosophic set by calculating truth, falsity and indeterminacy values of pixels and then, the clustering technique based on neutrosophic set is used for image segmentation. The cluster results are then refined to be more suitable for the segmentation. This algorithm provides better results than only K-means clustering approach. In research [7] combine K-Means and mathematical morphology to conduct fish image segmentation. The best number of clusters is determined by the number of gray histogram peaks and the cluster center data is filtered by comparing the mean with the threshold by Otsu. To get the contour of the fish body, the research uses mathematical morphology especially opening and closing. The result of the experiment, system achieves good result in separation between the fish image and the background with complex backgrounds.

To measure the validity of segmentation results, the authors conduct several tests by comparing the parameters used during segmentation, namely K from CosKNN. K-Means also uses K as the number of clusters that would produce K layer of the segmented image, where the greater the K the more objects will be produced by K-Means. In this study, we use $K = 3$ as the number of clusters. The features used in K-Means are Red, Green and Blue bands from the RGB color space. The K of CosKNN affects the classification results where the selection of K neighbors is a difficult problem. In the classic K-NN, if the K is too small, the prediction results will be sensitive to the presence of noise. On the other hand, if K is too large, then the closest neighbor chosen may be too much from another class which is actually irrelevant because of the distance too far [8]. The number of fish eye objects on the results of segmentation is far less than other objects, and attention to fish eyes is more important than not fish eyes, so performance measurements can't use accuracy, in this study the authors use precision and recall as evaluation metrics. The authors also conduct tests by comparing between CosKNN and the other methods, as follows: classic KNN and K-Support Vector Nearest Neighbor (K-SVNN). This test is used to prove that CosKNN achieved better performance rather than other methods.

The authors use 71 images of fish eyes with varying sizes ranging from 180x180 pixels to 655x655 pixels. The image of the fish eye has gone through the crop stage of all parts of the fish body. The image is taken in a normal environment in the morning and evening. At night there is no other lighting except the room lights. Image taking distance is 20-30 cm with normal image effects.

II. RESEARCH METHODOLOGY

A. Segmentation Framework

The segmentation framework is presented in Figure 1. The framework for segmentation of milkfish eyes using K-Means and CosKNN is explained as follows:

1. Extract Red, Green and Blue band of RGB color space
In this first step, the authors separate Red, Green and Blue bands from RGB images. The three bands will be used as clustering features with K-Means.
2. Arrange R, G, B band to be K-Means dataset
Each band R, G and B is one layer images, so the authors arrange for each band to act as a feature on K-Means. Suppose that $[r, c]$ is the size of the row and column of the band, so we change the size of each band into the matrix $[rxc, 1]$. By combining the three band matrices into the matrix $[rxc, 3]$ then we get the K-Means dataset with rxc data and 3 features.
3. Clustering with K-Means
In this step, we do clustering with K-Means. The distance used to measure the similarity is Euclidean, while the number of clusters used during this study is 3 clusters.
4. Reshape K cluster to be K layer image
The K cluster as a result of K-Means clustering will be K layer image. Each layer must be reshape into the original rxc image.
5. Morphological operation
At each layer, the image is treated by morphological operations to reduce small and useless objects. The morphological operations used are closing and opening using strel disk with a radius of 1 pixel.
6. Shape and color features extraction
In this step, we extract the shape and color features. In the shape feature, the authors extract circularity, major and minor axis objects, eccentricity, and major axis ratios with image width. In the color feature, the authors extract the mean and standard deviation from the gray image of each object.
7. Cosine K-Nearest Neighbor (CosKNN) classification
This step is the final step of segmentation where extracted features are classified using CosKNN. In this study we used many variations of K, as explained in the next section.

B. The Dataset

We generated 71 images of fish eyes that have gone through the cropping stage of all parts of the fish body, the image size varies from 180x180 pixels to 655x655 pixels. The image is captured in the normal morning and night environment. At night there is no help from other lights besides the room lights. Image capturing distance is 20-30 cm with normal image effects. The environment of image taking in this study is adjusted to the situation when the application would be used in a normal environment. In all

images there is only one fish eye object. Examples of fish eye images used in this study are presented in Figure 2 (a) - (c).

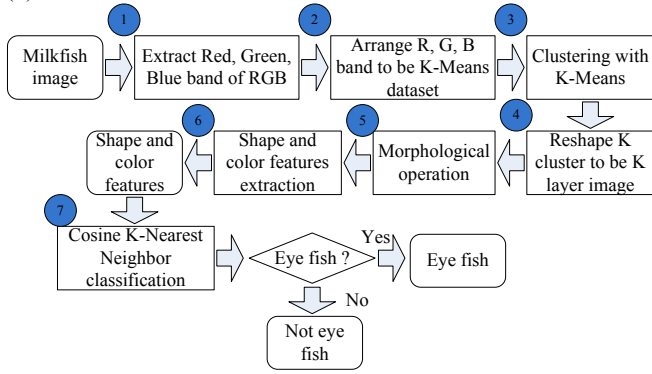


Fig. 1. Framework for milkfish segmentation using K-Means and CosKNN

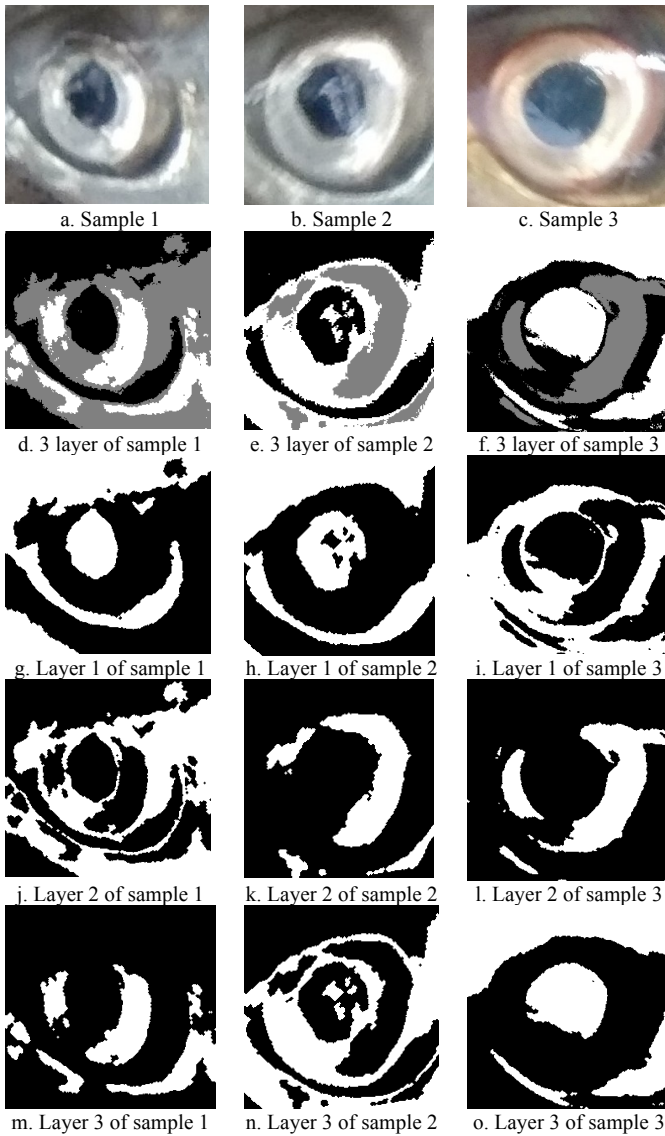


Fig. 2. Milkfish eye images and the result of K-Means clustering with 3 cluster

C. Cosine K-Nearest Neighbor (CosKNN)

In the classic K-NN, if the K is too small, the prediction results will be sensitive to the presence of noise. On the other hand, if K is too large, then the closest neighbor chosen may be too much from another class which is actually irrelevant because of the distance too far [8]. To solve this problem we propose Cosine KNN where we use soft values that represent ownership of each class to the test data. This soft value is highly dependent on the distance between the test data and the K nearest neighbor. To get a Cosine value for each nearest neighbor, we involve a pair of two neighbors. So, for the 3 closest neighbors, we will get 3 pairs of neighbors. For example the 3-NN is $x_1, x_2,$ and x_3 . Then the pair is: x_1x_2, x_1x_3, x_2x_3 . Furthermore, each pair will have 2 cosine values according to the data pair. The cosine values are then added together according to each class.

Suppose the class of the data set is $C=c_1, c_2, \dots, c_n$, where n is the number of classes. While $X = x_1, x_2, x_3, \dots, x_k$ is the nearest neighbor chosen from the training data, k is the number of nearest neighbor. Then for the nearest neighboring pair x_i and x_j will have the cosine value as follows:

$$\text{Cos}(x_i x_j) = 1 - \frac{d_i}{\sqrt{d_i^2 + d_j^2}} \quad (1)$$

$$\text{Cos}(x_j x_i) = 1 - \frac{d_j}{\sqrt{d_i^2 + d_j^2}}$$

Where d is the distance of training data to test data. $\text{Cos}(x_1 x_2)$ will belong to the c_i class according to the class owned by x_1 . For example, the pair of closest neighboring and class as follows: $(x_1, c_1), (x_2, c_2), (x_3, c_1)$. Then the cosine value for the pair $x_1 x_2$ is:

$$\text{Cos}(x_1 x_2) = 1 - \frac{d_1}{\sqrt{d_1^2 + d_2^2}} \text{ will belong to the class } c_1, \text{ and}$$

$$\text{Cos}(x_2 x_1) = 1 - \frac{d_2}{\sqrt{d_1^2 + d_2^2}} \text{ will belong to the class } c_2.$$

Next, to accumulate all cosine values of the R test data in the class c_j , we use (2):

$$\text{SumofCos}(R, c_j) = \sum_{i=1}^n \text{Cos}(x_i, c_i = c_j, j = 1, \dots, n) \quad (2)$$

The $\text{SumofCos}(R, c_j)$ is a soft value that ranges in $[0, \infty]$. A value of zero (0) means that none of the nearest neighbors has a class c_j . The greater K used, the greater this value corresponds to the number of cosines calculated.

III. RESULTS AND DISCUSSIONS

We apply testing the CosKNN by classifying 71 segmented fish eye images with K-Means clustering, we use K-fold Cross Validation with $K = 3$, meaning that 2/3 part of the data is used as training data while 1/3 part as the testing data. For CosKNN classification, we use varies of K as follows: 3, 5, 7, 9, 11, 13, 15, 17 and 19. In each K, we evaluate using precision and recall. Next, we get the average precision and recall from all of them.

The segmented image with K-Means clustering is presented in Figure 2 (d) - (o), the clustering result of sample 1 is presented by image (d), while each layer is presented by Figure 2 (g), (j) and (m). In Figure 2(d) we present code of layer 1, 2 and 3 by black, grey and white respectively. Then, each code is presented by binary image in Figure 2 (d), (j) and (m). Similarly for samples 2 and 3.

The results of the CosKNN classification on sample 1 images are presented in Table I. The RM2M column is the ratio of Minor Axis Length and Major Axis Length. Real Label is a sign whether the object is a fish eye or not (1 means eye fish, 0 means not). The Result column is the classification result by CosKNN with selected features, we divide it into 3 types as follows: S (Shape feature), C (color feature), and S + C (Shape and Color feature). There are 25

objects divided into 3 clusters, fish eye objects is attended to cluster 1, on all types of features, all predict as fish eyes correctly both shape, color and shape + color. There are no objects other than fish eyes that are recognized as fish eyes. So, all segmentation results are perfect.

The results achieved by the image sample 2 are presented in Table II, there are 16 objects divided into 3 clusters, the fish eye object is attended to cluster 1, on all feature options, shape features and shape and color combinations successfully predict correctly. While the color feature is failed to predict as a fish eye (zero value). The color feature also incorrectly predicts two object as a fish eye. So, the results of this segmentation only succeed in the shape and combination of shape and color features.

TABLE I. THE RESULT OF COSKNN CLASSIFICATION FOR IMAGE SAMPLE 1

No.	Cluster	Circularity	RM2M	Eccentricity	RM2W	Average	Stadev	Real Label	Result		
									S	C	S+C
1	1	0.11	0.92	0.39	1.14	83.67	23.24	0	0	0	0
2	1	0.48	0.51	0.86	0.36	75.71	19.39	0	0	0	0
3	1	0.85	0.74	0.67	0.32	70.75	22.27	1	1	1	1
4	1	0.53	0.54	0.84	0.11	112.86	5.03	0	0	0	0
5	2	0.42	0.40	0.92	0.18	189.18	25.98	0	0	0	0
6	2	0.75	0.88	0.47	0.07	183.42	11.58	0	0	0	0
7	2	0.30	0.31	0.95	0.30	189.96	11.27	0	0	0	0
8	2	0.37	0.48	0.88	0.25	197.55	16.92	0	0	0	0
9	2	1.99	1.00	0.00	0.01	173.34	1.68	0	0	0	0
10	2	1.99	1.00	0.00	0.01	169.12	2.44	0	0	0	0
11	2	0.94	0.54	0.84	0.05	177.27	2.32	0	0	0	0
12	2	0.32	0.43	0.90	0.52	219.10	26.77	0	0	0	0
13	2	0.21	0.37	0.93	0.57	201.16	27.24	0	0	0	0
14	2	1.99	1.00	0.00	0.01	158.77	5.83	0	0	0	0
15	2	0.27	0.38	0.92	0.18	184.10	9.80	0	0	0	0
16	2	1.64	0.68	0.73	0.02	161.04	3.58	0	0	0	0
17	2	0.89	0.57	0.82	0.02	173.55	4.93	0	0	0	0
18	2	2.39	0.68	0.73	0.01	100.49	8.00	0	0	0	0
19	3	0.09	0.24	0.97	1.30	149.52	24.10	0	0	0	0
20	3	0.25	0.62	0.79	1.01	147.99	47.00	0	0	0	0
21	3	0.70	0.28	0.96	0.04	150.13	9.24	0	0	0	0
22	3	1.93	0.84	0.55	0.01	151.69	12.86	0	0	0	0
23	3	1.07	0.44	0.90	0.03	154.22	11.69	0	0	0	0
24	3	1.22	0.79	0.62	0.02	98.86	3.44	0	0	0	0
25	3	0.13	0.24	0.97	0.36	148.14	17.54	0	0	0	0

TABLE II. THE RESULT OF COSKNN CLASSIFICATION FOR IMAGE SAMPLE 2

No.	Cluster	Circularity	RM2M	Eccentricity	RM2W	Average	Stadev	Real Label	Result		
									S	C	S+C
1	1	0.34	0.29	0.96	1.22	76.82	22.54	0	0	1	0
2	1	0.14	0.34	0.94	1.37	98.80	15.69	0	0	0	0
3	1	0.64	0.56	0.83	0.11	78.39	22.92	0	0	1	0
4	1	0.64	0.81	0.59	0.41	82.94	25.08	1	1	0	1
5	1	1.99	1.00	0.00	0.01	127.67	1.13	0	0	0	0
6	2	0.56	0.77	0.64	0.98	159.00	52.68	0	0	0	0
7	2	0.10	0.24	0.97	1.34	145.89	27.80	0	0	0	0
8	2	0.20	0.11	0.99	0.24	138.27	37.37	0	0	0	0
9	3	0.39	0.33	0.94	0.32	201.81	11.11	0	0	0	0
10	3	0.52	0.51	0.86	0.18	193.10	20.67	0	0	0	0
11	3	1.99	1.00	0.00	0.01	185.63	0.67	0	0	0	0
12	3	1.05	0.73	0.68	0.03	180.10	4.52	0	0	0	0
13	3	1.23	0.89	0.46	0.04	173.02	13.38	0	0	0	0
14	3	0.27	0.45	0.89	0.86	225.52	20.34	0	0	0	0
15	3	0.43	0.22	0.98	0.11	173.98	10.05	0	0	0	0
16	3	0.36	0.27	0.96	0.34	198.01	22.69	0	0	0	0

TABLE III. THE RESULT OF COSKNN CLASSIFICATION FOR IMAGE SAMPLE 3

No.	Cluster	Circularity	RM2M	Eccentricity	RM2W	Average	Stadev	Real Label	Result		
									S	C	S+C
1	1	0.06	0.83	0.56	1.18	157.60	23.84	0	0	0	0
2	1	1.41	0.62	0.79	0.01	105.91	0.43	0	0	0	0
3	1	1.41	0.62	0.79	0.01	161.84	8.98	0	0	0	0
4	1	1.99	1.00	0.00	0.01	99.82	1.44	0	0	0	0
5	1	1.69	0.81	0.59	0.01	110.65	2.03	0	0	0	0
6	2	1.23	0.61	0.79	0.02	133.68	22.35	0	0	0	0
7	2	0.91	0.50	0.87	0.02	191.00	1.13	0	0	0	0
8	2	0.49	0.31	0.95	0.05	192.15	1.53	0	0	0	0
9	2	1.99	1.00	0.00	0.01	191.10	0.21	0	0	0	0
10	2	0.34	0.16	0.99	0.25	207.85	8.40	0	0	0	0
11	2	0.41	0.37	0.93	0.38	212.21	11.46	0	0	0	0
12	2	1.34	0.58	0.81	0.02	192.63	0.37	0	0	0	0
13	2	0.65	0.40	0.92	0.04	193.19	0.56	0	0	0	0
14	2	0.19	0.42	0.91	0.84	232.54	19.31	0	0	0	0
15	2	0.47	0.17	0.98	0.05	104.61	8.13	0	0	0	0
16	2	0.78	0.28	0.96	0.03	86.59	18.03	0	0	0	0
17	3	0.33	0.27	0.96	1.28	75.87	16.00	0	0	0	0
18	3	0.18	0.13	0.99	0.50	117.00	7.20	0	0	0	0
19	3	0.61	0.84	0.54	0.40	82.72	15.83	1	1	0	1
20	3	0.66	0.43	0.90	0.04	125.83	1.28	0	0	0	0
21	3	1.93	0.84	0.55	0.01	136.92	5.54	0	0	0	0
22	3	1.40	0.75	0.67	0.02	105.57	13.88	0	0	0	0
23	3	1.10	0.50	0.87	0.02	83.22	11.66	0	0	0	0
24	3	0.29	0.48	0.88	0.52	93.80	17.36	0	0	0	0
25	3	1.25	0.53	0.85	0.02	131.25	1.12	0	0	0	0
26	3	0.72	0.49	0.87	0.03	131.29	3.06	0	0	0	0
27	3	1.03	0.47	0.88	0.02	97.35	15.27	0	0	0	0

The results achieved by the image sample 3 are presented in Table III, there are 27 objects divided into 3 clusters, the fish eye object is attended to cluster 3, on all feature choices, shape features and shape and color combinations successfully predict correctly. While the color feature is failed to predict as fish eye (zero value). There are no objects other than fish eyes that are detected as fish eyes. So, the results of this segmentation only succeed in the shape and combination of shape and color features.

We apply testing with the K option used by CosKNN. We choose K as follows: 3,5,7,9,11,13,15,17 and 19. By testing each K option in 71 images and Cross Validation, we get precision and recall. We compare the precision and recall performance of each feature shape, color and combination of shapes and colors. The results are presented in Figure 3.


In this study, precision means the number of fish eye images objects that have been detected from all objects detected as fish eyes. Of course, one image only contains one fish eye, so the recall means that the number of the eye fish images that have been detected from all the images tested.

In the graph presented in Figure 3 (a), the result of segmentation with precision of shape features are always the best among all the other features, even the color features provide very low precision below 70%. Thus, the classification for recognizing eye fish can be conducted using only the shape features, without combining color features.


The recall performance also provides similar results, the shape feature successfully classifies objects with the best performance on all varies of K, where recall is always above 90%. While the combination of shape and color features

achieve lower recall performance. Different results are achieved by the color feature where the recall achieved isn't up to 40%, of course this performance is very bad.

We resume performance evaluations into average precision and recall, as presented in Table IV. We also compare the performance with the other Nearest Neighbor method: KNN, and K-SVNN. For precision, CosKNN achieves the best performance for all varies of features compared to other method, the precision for shape, color, and combination of shape and color are 97.93%, 43.86%, and 95.14% respectively. The best recall performance are achieved by KNN with the shape feature, the recall performance is 92.10%. The recall performance of CossKNN achieves the best result with the combination of shape and color feature compared to other methods, the recall performance is 82.5%.

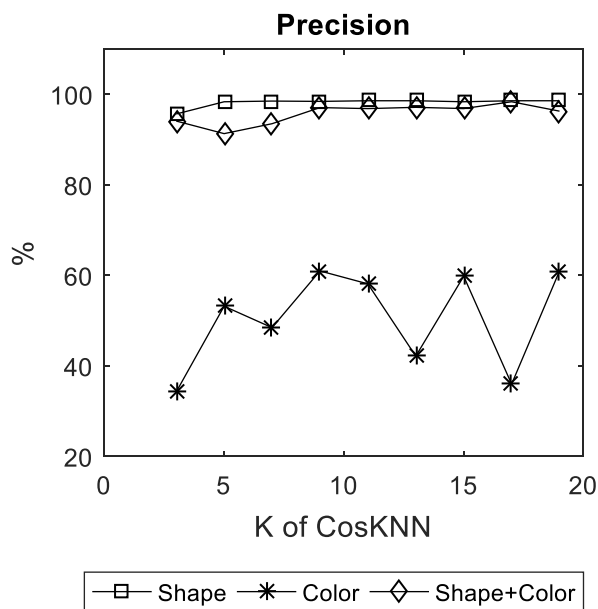

a. Precision performance

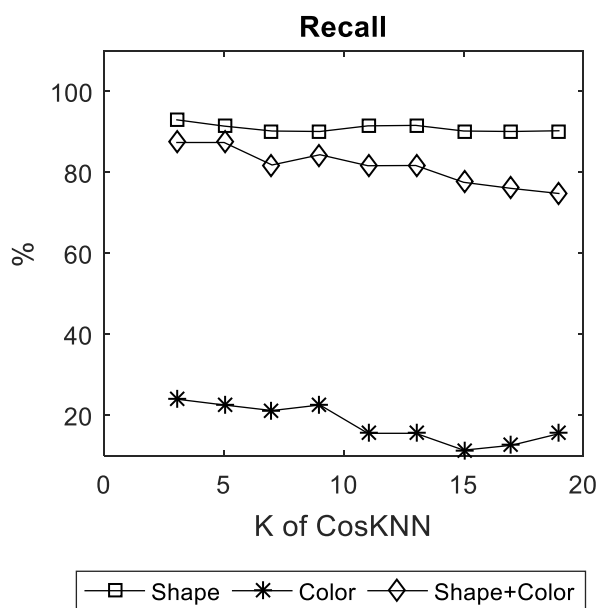

b. Recall performance

Fig. 3. Precision and recall performance

TABLE IV. THE RESULT OF COSKNN CLASSIFICATION FOR IMAGE SAMPLE 3

Features	Precision			Recall		
	CosKNN	KNN	K-SVNN	CosKNN	KNN	K-SVNN
Shape	97.93%	96.20%	95.77%	91.15%	92.10%	90.76%
Color	43.86%	43.86%	43.00%	19.30%	20.00%	21.44%
Shape+Color	95.14%	94.12%	95.09%	82.55%	82.23%	81.49%

This research also provides evidence that the color feature can't improve the system performance. This can be seen on all method used in this research that the color feature

performance isn't higher than 44%. Of course, this is bad performance.

IV. CONCLUSION

From the research conducted, it can be concluded that CosKNN achieves performance both precision and recall of 97.93% and 91.15%, respectively, all with shape features. Especially on precision performance, CosKNN achieves the highest performance compared to other methods, CosKNN, classic KNN and K-SVNN achieve 97.93%, 96.20%, and 95.77%. While in recall performance, KNN achieves the highest performance compared to other methods, CosKNN, classic KNN and K-SVNN achieve 91.15%, 92.10%, and 90.76%, respectively, all with shape features. The color features are less suitable because it provides very poor precision and recall performance, even the performance of the shape features decreases when joining color features. The suggestion for the next research is to try using texture features to classify fish eye objects and try other methods such as edge detection or other region-based methods to segment milkfish eyes.

ACKNOWLEDGMENT

We would like to thank Directorate of Research and Community Service (DRPM) DIKTI that fund Authors' research in the scheme of Basic Research year 2019 at University of Bhayangkara Surabaya, with contract number 008/SP2H/LT/MULTI/L7/2019 on 26 March 2019, and 170/LPPM/IV/2019/UB on 4 April 2019.

REFERENCES

- [1] L. K. S. Tolentino, Orillo, J.W.F., Aguacito, P.D., Colango1, E.J.M, Malit, J.R.H., Marcelino, J.T.G., Nadora, A.C., Odeza, A.J.D., "Fish Freshness Determination through Support Vector Machine," *Journal of Telecommunication, Electronic and Computer Engineering*, vol. 9, pp. 139-143, 2017.
- [2] I. C. Navotas, Santos, C.N.V, Balderrama, E.J.M., Candido, F.E.B., Villacanas, A.J.E., Velasco, J.S., "Fish Identification And Freshness Classification Through Image Processing Using Artificial Neural Network," *ARPN Journal of Engineering and Applied Sciences*, vol. 13, pp. 4912-4922, 2018.
- [3] E. Prasetyo, Adityo, R.D., Suciati, N., and Fatichah, C., "Mango Leaf Image Segmentation on HSV and YCbCr Color Spaces Using Otsu Thresholding," in *International Conference on Science and Technology*, Yogyakarta, 2017.
- [4] E. Prasetyo, "Eye Black Circle of Milkfish Segmentation on HSV Color Space," *Journal of Electrical Engineering and Computer Sciences*, vol. 3, pp. 377-380, 2018.
- [5] S. Zhang, Wang, H., Huang, W., You, Z., "Plant diseased leaf segmentation and recognition by fusion of superpixel, K-means and PHOG," *Optik*, vol. 157, pp. 866-872, 2018.
- [6] M. N. Qureshi, Ahamad, M.V., "An Improved Method for Image Segmentation Using K-Means Clustering with Neutrosophic Logic," in *International Conference on Computational Intelligence and Data Science*, 2018, pp. 534-540.
- [7] H. Yao, Duana, Q., Li, D., Wang, J., "An improved K-means clustering algorithm for fish image segmentation," *Mathematical and Computer Modelling*, vol. 58, pp. 790-798, 2013.
- [8] X. Wu, Kumar, V., *The Top Ten Algorithms in Data Mining*. Boca Raton London: CRC Press Taylor & Francis Group, 2009.